




Garlock BEARING MANUFACTURING LTD

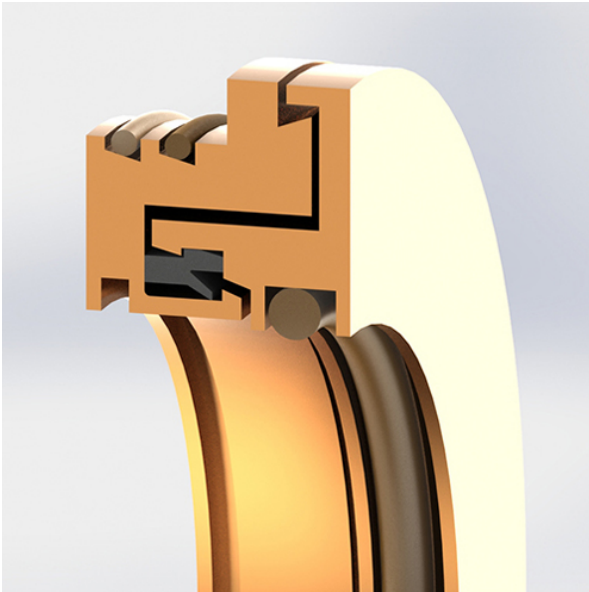

29602-1345 Bearing 2D drawings and 3D CAD models

Garlock 29602-1345 Shields & End Covers Bearing Isolators

Bearing No. 29602-1345

| | |
|-------------------------------|--|
| shaft diameter: | 2.3600 in |
| typical application: | Exceptional Bearing Protection, Rotating Applications, Pumps, Gearboxes, Motors, Energy Efficient Applications, Primary Metals Industry, Steel Industry, Aluminum Industry, Pulp and Paper Industry, Che |
| lip material: | Labyrinth |
| harmonization code: | 8487900040.US |
| construction description: | Guardian® Flanged Design, Bronze Rotor and Stator with Filled PTFE Unitizing Ring, FKM O-Rings, and 0.325" Flange Guardian® Flanged Design Bronze Rotor and Stator with |
| manufacturer catalog number: | 29602-1345 |
| continuous temperature range: | -22 to 400 ° F |
| Weight | 1.65 lbs |
| maximum shaft surface speed: | 12000 fpm |
| D | 3.7350 in |
| misalignment tolerance: | 0.020 in |
| width: | 0.7000 in |
| pressure tolerance: | Ambient |



Garlock BEARING MANUFACTURING LTD