




Garlock BEARING MANUFACTURING LTD

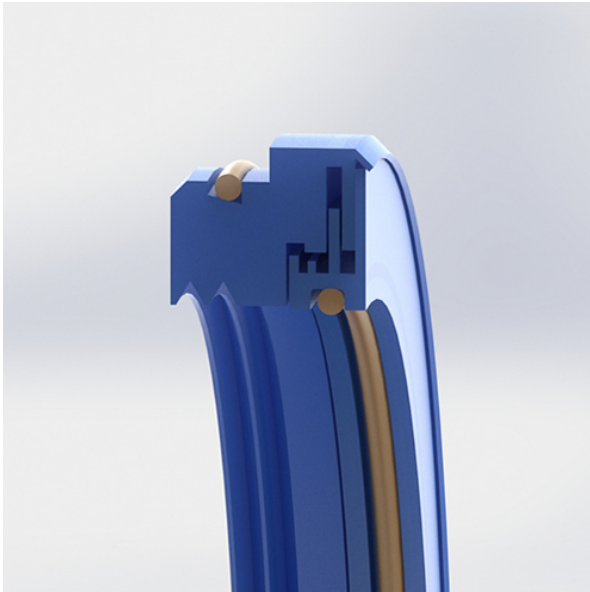

29502-5539 Bearing 2D drawings and 3D CAD models

Garlock 29502-5539 Shields & End Covers Bearing Isolators

Bearing No. 29502-5539

shaft diameter:	1.5750 in
typical application:	Exceptional Bearing Protection, Rotating Applications, Pumps, Gearboxes, Motors, Energy Efficient Applications, Primary Metals Industry, Steel Industry, Aluminum Industry, Pulp and Paper Industry, Che
lip material:	Labyrinth
harmonization code:	3926904590.US
construction description:	ISO-GARD® Flanged Design, Filled PTFE Rotor and Stator, FKM O-Rings, and 0.375" Flange ISO-GARD® Flanged Design Filled PTFE Rotor and Stator FKM O-Rings and 0.375"
manufacturer catalog number:	29502-5539
continuous temperature range:	-22 to 400 ° F
Weight	0.143 lb
maximum shaft surface speed:	4500 fpm
D	2.3620 in
misalignment tolerance:	0.020 in
width:	0.7500 in
pressure tolerance:	Ambient



Garlock BEARING MANUFACTURING LTD